



Waldhornstrasse 12
D-88662 Überlingen
Fon: +49 (0) 7551.1234
Fon: +49 (0) 7551.4444
Fax: +49 (0) 7551.918888
www.winkler-technik.com

Winkler Technik



Fast Mounting Clip WKT

for fast tube laying



- low inventory
for all current tube dimensions:
the same clip works for
OD 16 - 20 mm (1/2" - 5/8") - clip 1622
OD 17 - 25 mm (5/8" - 3/4") - clip 1725
for corrugated pipe
17 - 20 mm (5/8") - clip 1725
for heating tubes
- quickly mounted on
wire mesh from above
- significant space
from tube to wire mesh -
destruction of the outer
oxygen barrier will be prevented


Technical Data

item No.	for wire diameter	for corrugated pipe Ø	for heating tubes Ø	colour	packing unit	weight approx.
1622	3 - 4.5 mm (1/8"-3/16")	16 - 20 mm (1/2"-5/8")	16 - 20 mm (1/2"-5/8")	may vary	1,000 / carton	6.1 kg (13.4 lbs.)
1725 PP-3	3 mm (1/8")	17 - 25 mm (5/8"-3/4")	17 - 20 mm (5/8")		1,000 / carton	8.2 kg (18.0 lbs.)
1725 PP-4	4 mm (3/16")	17 - 25 mm (5/8"-3/4")	17 - 20 mm (5/8")		1,000 / carton	8.0 kg (17.6 lbs.)
1725 PP-5	5 mm (13/64")	17 - 25 mm (5/8"-3/4")	17 - 20 mm (5/8")		1,000 / carton	7.8 kg (17.2 lbs.)
1725 PP-6	6 mm (1/4")	17 - 25 mm (5/8"-3/4")	17 - 20 mm (5/8")		1,000 / carton	7.6 kg (16.7 lbs.)
1725 PP-8	8 mm (5/16")	17 - 25 mm (5/8"-3/4")	17 - 20 mm (5/8")		1,000 / carton	7.2 kg (15.8 lbs.)


Subject to technical changes GT 07. 16/02

Fast Mounting Clip WKT

Recommended Installation of clip 1622 / 1725

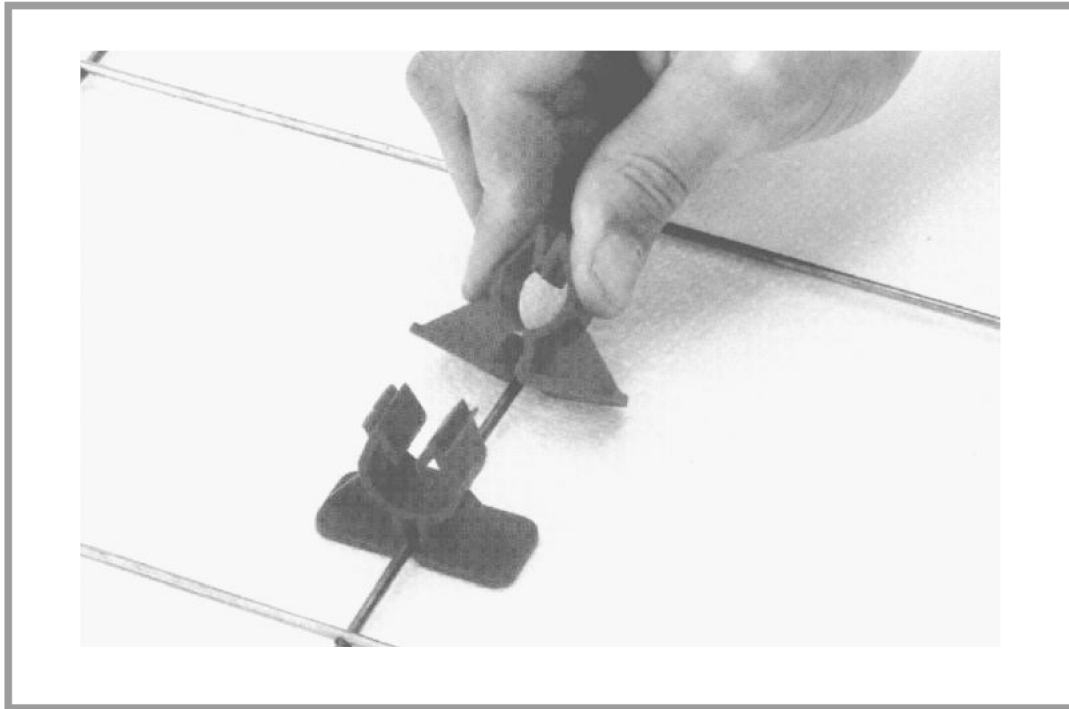

- Grasp the clip and squeeze at the top. That way the base stretches and you can easily and quickly put the clip on the wire mesh.

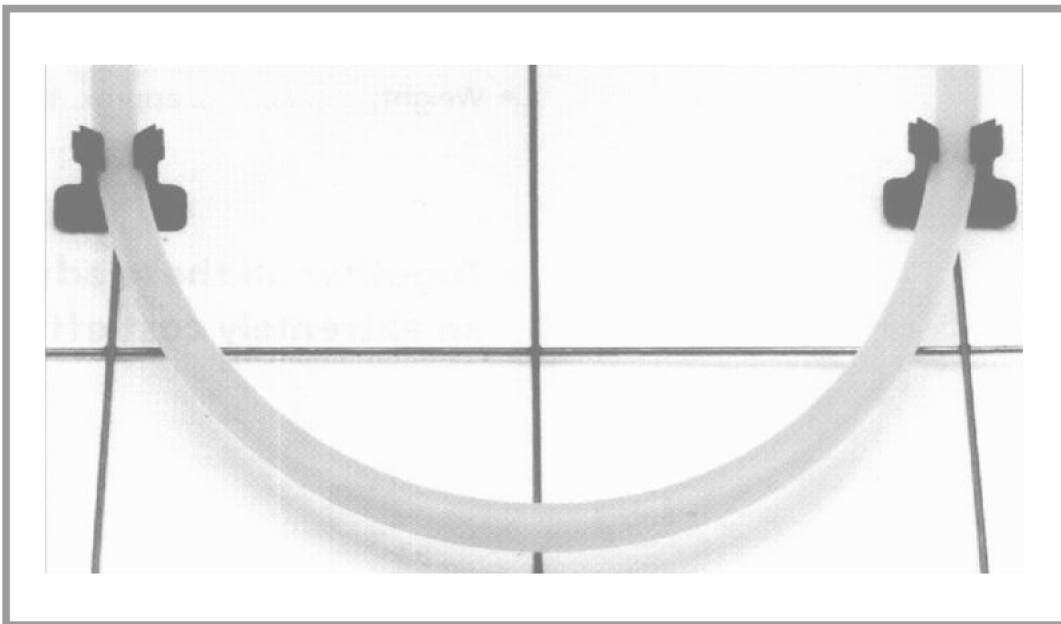

- When laying the tube, make sure that it doesn't twist. It is meant for the middle or zero line of the tube to be a straight line. It ensures that the tube won't stand up in the bends and stays right in place.