



Waldhornstrasse 12
 D-88662 Überlingen
 Fon: +49 (0) 7551.1234
 Fon: +49 (0) 7551.4444
 Fax: +49 (0) 7551.918888
 www.winkler-technik.com




**Winkler
 Technik**



Clip Rail CFS1620

for all pipe diameters from 16 up to 20 mm (1/2" to 5/8")

- low design 24 mm (1") only 3.5 mm (1/8") tube lifting
- screed can seep through the holes and form a solid compound
- extension possible through easy, soluble snap joints
- tube distance 50 mm (2")
- also available with integrated barbed hooks

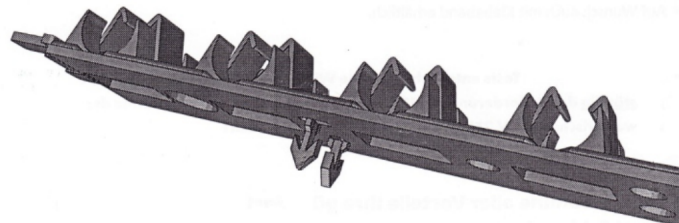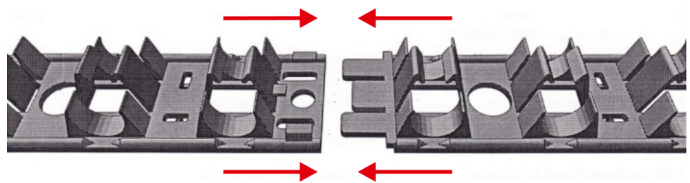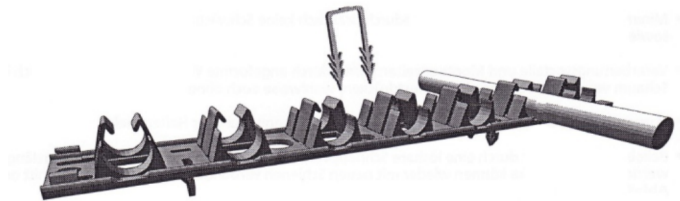

Technical Datas

item no.	for tubing OD	length	colour	packing unit	weight
CFS1620	16-20 mm (1/2"-5/8")	1 m (3 1/4 ft)	black	100 m (328 ft)/carton	20 kg (44.1 lbs.)
				1,500 m (4,921 ft)/pallet	316 kg (696.7 lbs.)
CFS1620K (adhesive tape)	16-20 mm (1/2"-5/8")	1 m (3 1/4 ft)	black	100 m (328 ft)/carton	20 kg (44.1 lbs.)
				1,500 m (4,921 ft)/pallet	319 kg (703.3 lbs.)
CFS1620W/10/900 (barbed hook)	16-20 mm (1/2"-5/8")	1 m (3 1/4 ft)	black	900 m (2,953 ft)/carton	222 kg (489.4 lbs.)
				1,800 m (5,906 ft)/pallet	460 kg (1014.1 lbs.)

Subject to technical changes KG 12.24/10

Clip Rail CFS1620